

CATALOGUE 2020

eSATAp 3 in 1

eSATAp 3 in 1 is eSATAp, USB3.0 and USB2.0 integrated in one connector, you can connect not only Power Over eSATA devices but also standard eSATA and standard USB3.0/2.0 devices.




External Enclosure mSATA SSD > Multiport USB 3.0 + eSATAp



For mSATA memory 1.5 Gb/s, 3 Gb/s and 6 Gb/s SSD with half size or full size

black

with full-PCB

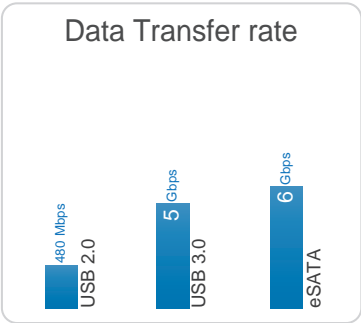

- Cable content**
- USB 3.0 cable
 - Power cable
 - eSATAp cable

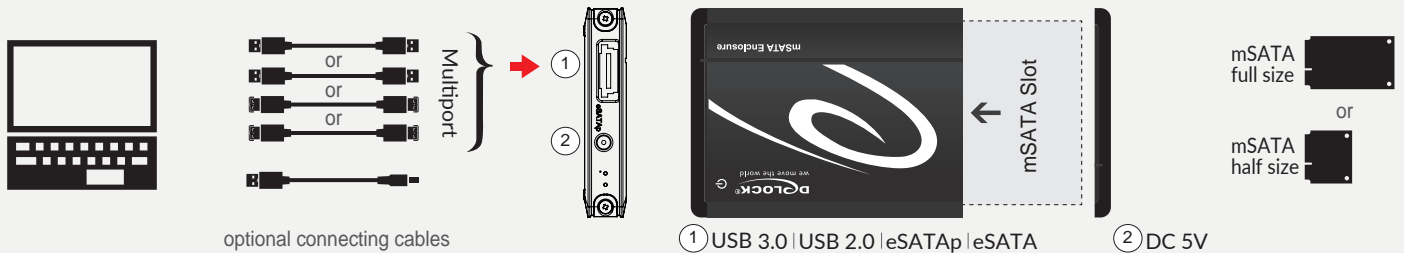


2.5" External Enclosure SATA HDD > Multiport SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)

Suitable for 2.5" SATA HDD / SSD: HDD height up to 9.5 mm

Chipset: Asmedia ASM1351 + ASM1456


silver

with full-PCB

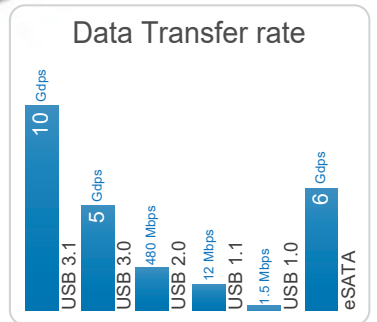

Cable content

- USB Typ-A male to USB-C™ male, length ca. 50 cm

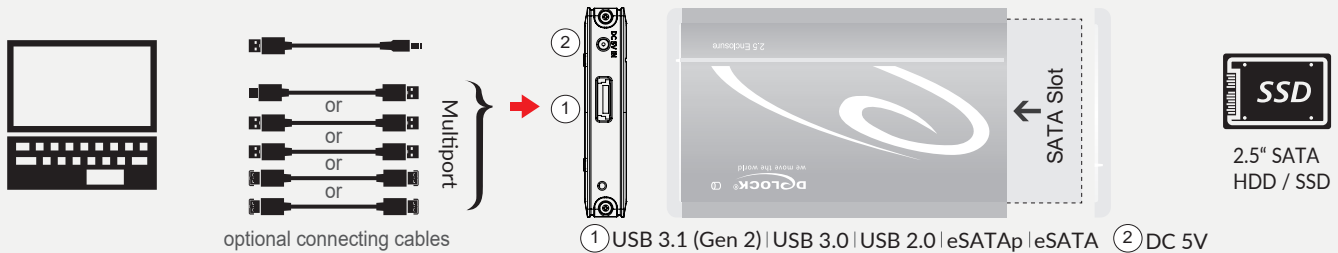


Windows
7/7-64/8.1/8.1-64/
10/10-64



LED indicator for power



PCB Full-PCB



HDD Height up to 9.5 mm



Dimensions 136 x 80 x 16 mm




Hot Swap Plug & Play

2.5" External Enclosure SATA HDD > Multiport SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)

Suitable for 2.5" SATA HDD / SSD: HDD height up to 15 mm
Chipset: Asmedia ASM1351 + ASM1456


black

with full-PCB

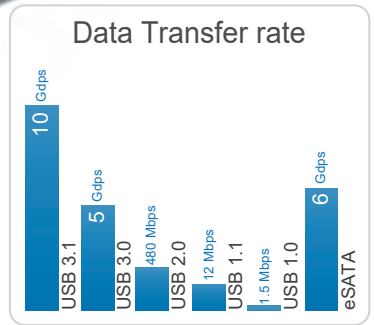

Cable content

- USB Typ-A male to USB-C™ male, length ca. 50 cm

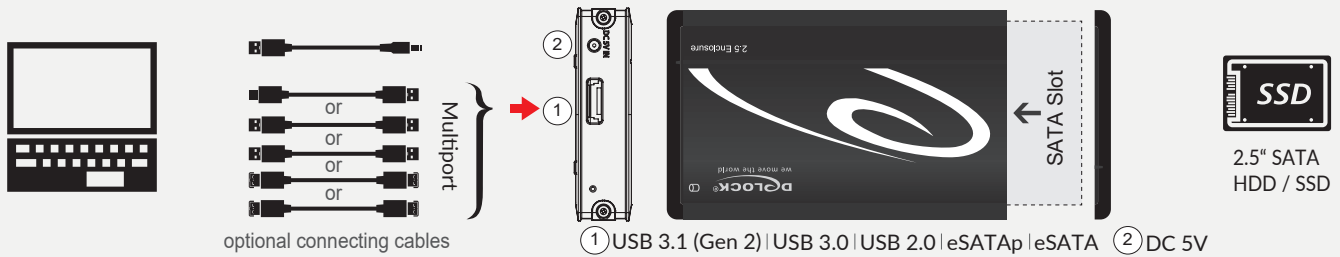


Windows
7/7-64/8.1/8.1-64/
10/10-64



LED indicator for power



PCB Full-PCB



HDD Height up to 15 mm



Dimensions 136 x 80 x 21 mm




Hot Swap Plug & Play

External Enclosure mSATA SSD > Multiport SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)

For mSATA memory 1.5 Gb/s, 3 Gb/s and 6 Gb/s SSD with half size or full size
Chipset: Asmedia ASM1351


black

with full-PCB

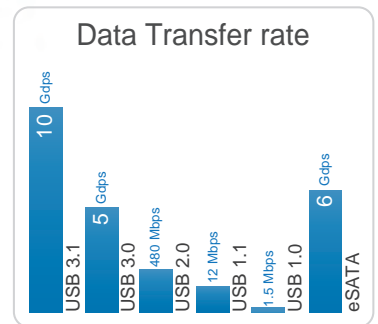

Cable content

- Cable USB Typ-A male to USB-C™ male, length ca. 50 cm

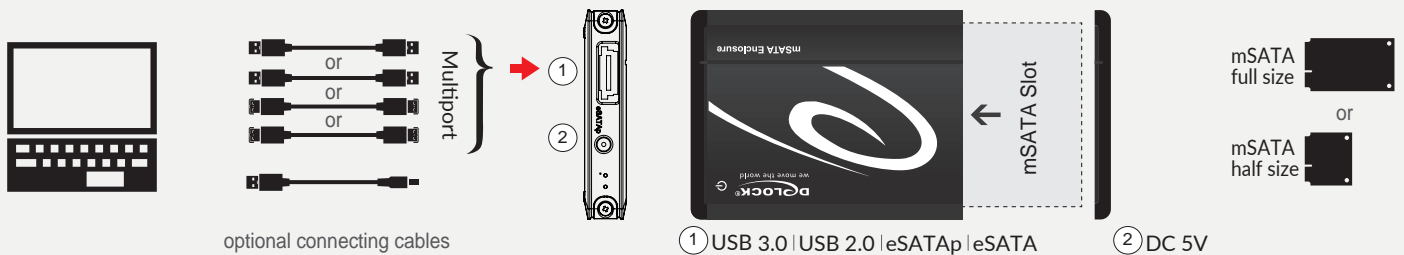



Adapter USB 3.0 to eSATAp

Supports SATA 1.5 Gb/s and SATA 3 Gb/s devices
 USB: only voltage supply, no data transfer

black



Data Transfer rate

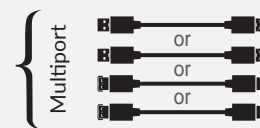

① eSATAp | eSATA

optional connecting cables



Windows
 XP/XP-64/Vista/
 Vista-64/7/7-64/8




Linux
 ex Kernel 2.6



Mac OS
 ex 10.7



voltage
 eSATA 5 V



transfer rate up to
 3 Gb/s



Hot Swap
 Plug & Play

Front Panel 2 x Multiport USB 3.0 + eSATAp

For installation into 3.5 bay
 Slot bracket for installation into a PC slot
 OS independent, no driver installation required

black



- Cable content**
- 2 x SATA cable
 - 1 x USB 3.0 cable
 - Power cable 4 pin to 4 pin Molex




Slot bracket 1 x eSATApd 5 V / 12 V



Cable content

- Floppy power cable, length ca. 49 cm
- SATA data cable, length ca. 49 cm
- USB pin header female cable, length ca. 46 cm



① USB 3.0 | USB 2.0 | eSATAp | eSATA






optional connecting cables





Voltage
eSATApd 5 V and 12 V

Adapter Power-over-eSATA (with USB) > 1x eSATA and 1x USB

black

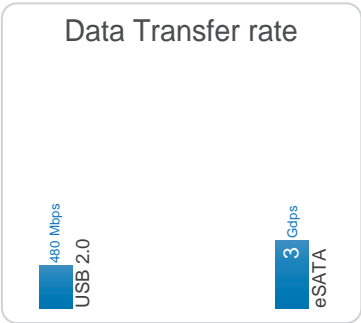

① eSATAp ② USB



optional connecting cables



transfer rate eSATA up to 3 Gb/s




transfer rate USB up to 480 Mbps



PCI Express Card > 2 x Multiport USB 3.0 + eSATAp

Supports SATA Port Multiplier


PCIe 2.0

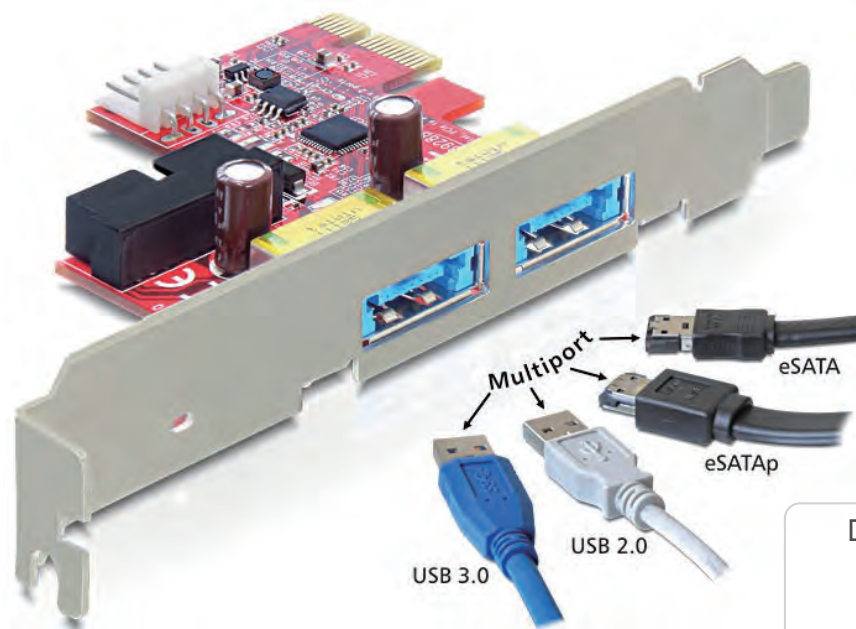

- Cable content**
- USB 3.0 cable
 - Power cable

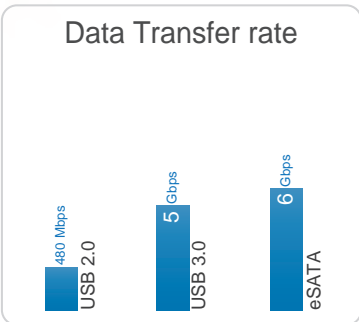

① USB 3.0 | USB 2.0 | eSATAp | eSATA

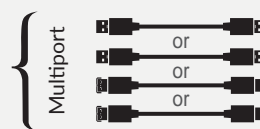

optional connecting cables



Windows

2000/XP/XP-XP/64/
Server-2003/Server-2003-64
Vista/Vista-64/7/7-64



Voltage
eSATAp 5 V